




Key steps to safe isolation

Stay safe, lock off and prove dead



Disconnect all leads.

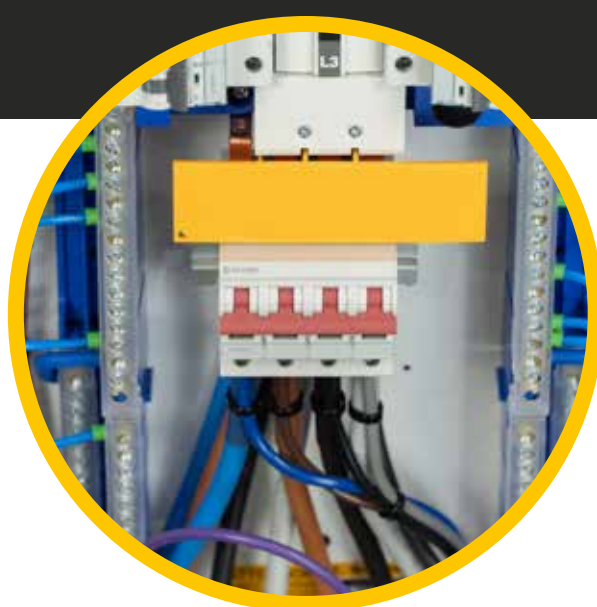

Locate the source of the supply.



Isolate the source of supply. Lock off and place warning tags.



Prove your voltage indicator using a proving unit.



Discover Martindale VIPDLOK kits
- complete solutions for safe isolation



Complete
Work can begin



Re-prove the voltage indicator using a proving unit



Test the supply is isolated

Trusted since 1928

www.martindale-electric.co.uk
+44 (0)1923 441717
sales@martindale-electric.co.uk

MARTINDALE
ELECTRIC
Keeping You Safe