

LOK6 SERIES LOCK OFF DEVICES

INSTRUCTION MANUAL

LOK6 is a lock off device for individual **Red Spot** fuse holder bases up to 100A and other similar designs following removal of the fuse carrier. **LOK6W** has been designed to fit **Henley** and **Lucy Service Cut Outs** and is also suitable for larger **Red Spot** holders rated at 63A and 100A. **LOK6-200** is for **Red Spot** holders rated at 200A and 400A.


Many Red Spot style fuse holders, still in widespread use today, are made of brittle materials that can be fractured easily by the sharp grub screw found in conventional MCB / Fuse lock-off devices. The LOK6 Series uses an effective clamp system to grip the wall of the fuse holder base without risk of damage. The clamp system accommodates wall thicknesses from 2mm to 5mm with ease.

The device is clamped adjacent to the terminal at one end of the fuse holder, rendering it safe against accidental finger access. For added safety, the design includes an integral sliding cover which can be adjusted according to the fuse size/rating to reduce accidental finger access at the far end of the fuse holder base.


LOK6 SERIES INSTALLATION GUIDE

BEFORE INSTALLATION, conduct a RISK ASSESSMENT. Wear appropriate PPE. Remove the fuse carrier from the fuse holder base.

Open toggle and unscrew to open inner jaw.

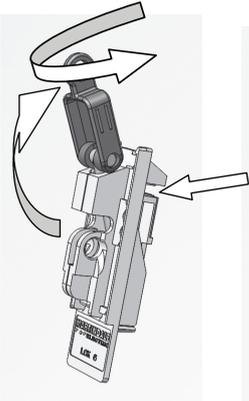


Place jaws centrally over end wall of fuse holder base.

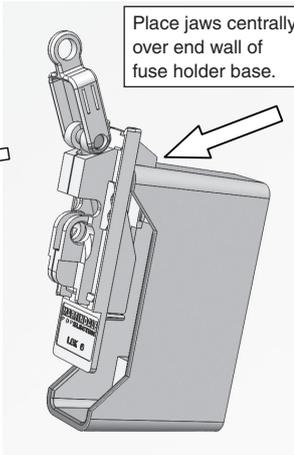


Tighten toggle, finger-tight ONLY.

DO NOT OVERTIGHTEN.

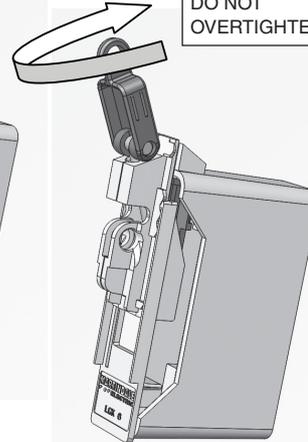


Adjust sliding cover to suit overall length of fuse holder base.

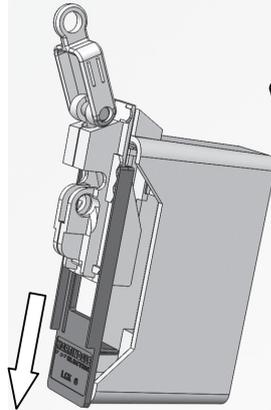

Close toggle. Check that the locking off device is secure.

Fit padlock and tag as desired.

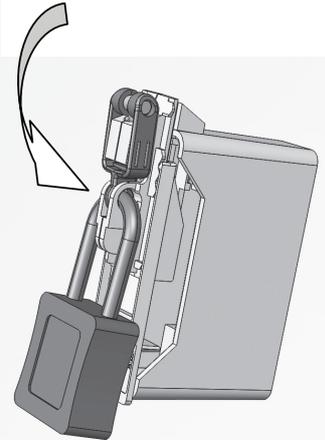

All models are quick to install without the need for any tools. The construction is all insulating plastic, without any metal parts, to reduce the risk of use in live working environments.

Material is a tough flame-retardant blend of polycarbonate+ABS for high impact strength and long term durability. Colour is bright yellow for easy identification.

The LOK6 Series can take a wide range of locking padlocks with shackles up to 7mm diameter. For added safety, Martindale Electric recommends the insulated padlock PAD21RD.

The overall head height is low after installation, making it possible to close most cabinet doors if desired.

Order codes:

MARLOK6

Lock off device for Red Spot style fuse holder bases up to 100A.

MARLOK6-200

Lock off device for Red Spot style fuse holder bases rated at 200A & 400A.

MARLOK6W

Lock off device for Henley and Lucy Service Cut Outs and Red Spot style fuse holder bases rated at 63A & 100A.

Recommended accessories:

MARPAD21RD

Red Insulated body padlock with insulated nylon shackle.

MARTAG4

Danger warning tags (10 pcs)

Martindale Electric Company Limited
Metrohm House, 12 Imperial Park, Imperial Way, Watford, WD24 4PP, UK
Tel: +44 (0)1923 441717 Fax: +44 (0)1923 446900
E-mail: sales@martindale-electric.co.uk
Website: www.martindale-electric.co.uk